

# USTER® *TENSOJET 5*

The WEAVABILITY™ measurement system

## Technical Data


November 2021

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

High performance tensile instrument gives a precise forecast of yarn runability for high performance processes with a testing speed of 400 m/min.

### Elements of the Uster Tensojet 5 installation

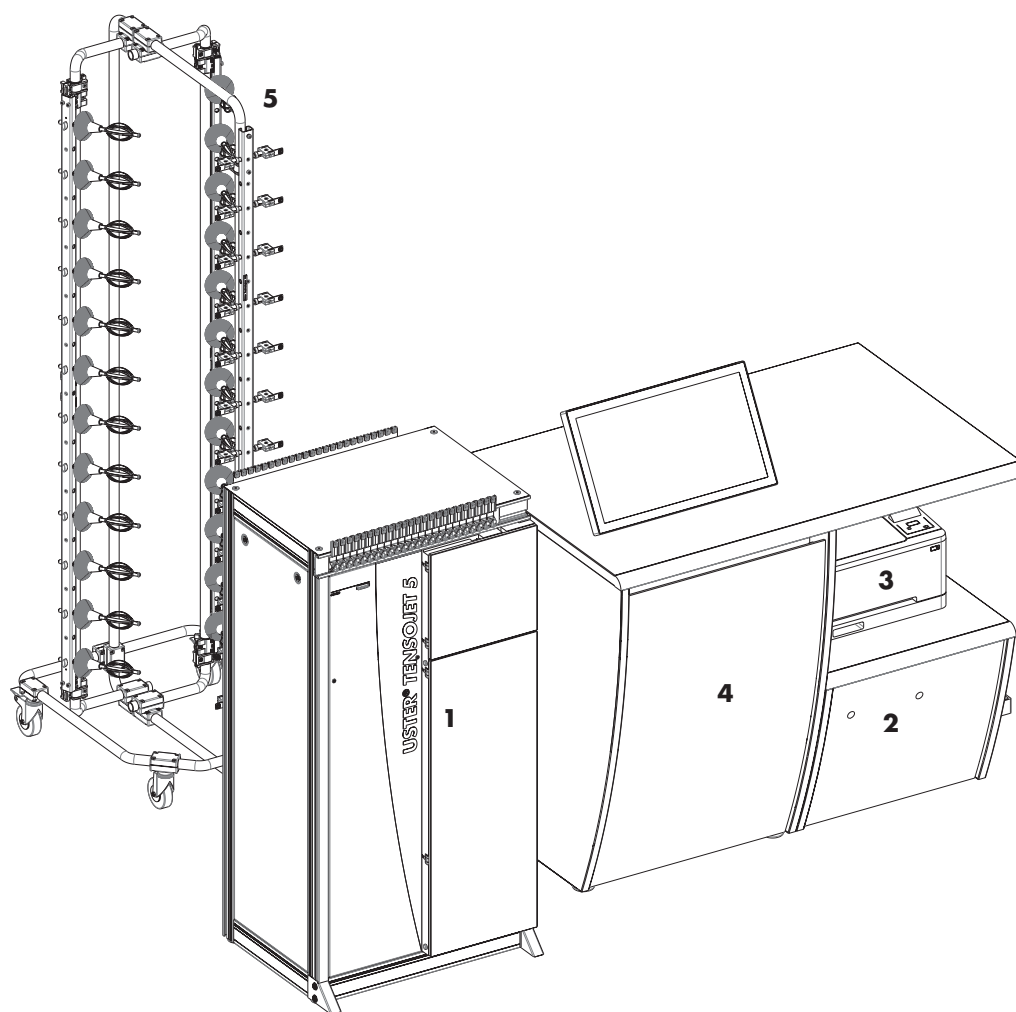

#### Basic installation

- 1 Test unit
  - Sensor for force and elongation
  - Sensor temperature and humidity
- 2 Control unit
- 3 Printer provided by the customer
- 4 Table with touchscreen and integrated waste box

#### Options

- 5 Package truck
- 6 Calibration device ISO Inspect (no illustration)

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

### Basic installation

#### Overall Installation

#### Functions

- Measurement of tensile strength and elongation of staple fiber yarns
- Analysis, evaluation and storage of measurement values
- Automatic check of all measured values
- Yarn classification based on the Uster Statistics
- Editor for customizing reports and setting of mill limits
- Filter functions for quick data selection and for the preparation of long-term reports

#### Included in the delivery

- Test unit
- Control unit
- Touchscreen
- Application software
- Table

### Subsystem of the Uster Tensojet 5 basic version:

#### Test unit (1)

#### General instrument type

- Recommended for staple fiber yarns 5 – 150 tex (Nm 7 to 200; Nec 4 to 119)
- Special staple fiber yarns on request: especially for linen yarns, plied yarns, waxed yarns, technical yarns, silk yarns, slub or fancy yarns, high-volume yarns
- It is not recommended to measure core yarns

#### Measuring principle

Constant rate of extension CRE

#### Testing method

Simple tensile test.  
Testing capacity 30,000 per hour at 400 m/min testing speed

#### Force measuring arrangement

Practically inertialess electronic force measurement

#### Elongation measuring arrangement

- Electronic elongation measurement
- Measuring accuracy for force and elongation measurement: for force  $\pm 1\%$  (above 100 cN) or  $\pm 1$  cN (below 100 cN), and for elongation  $\pm 1\%$

#### Clamp speed

200 and 400 m/min

#### Pre-tension

Adjustable between 5 and 500 cN

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

|                  |                                   |  |
|------------------|-----------------------------------|--|
| Control unit (2) | <b>Test lengths</b>               | 500 mm (necessary yarn length 800 mm/break)  |
|                  | <b>Force measuring range</b>      | 0.7–30 N   |
|                  | <b>Elongation measuring range</b> | 3–30%  |
|                  | <b>Yarn changer</b>               | <ul style="list-style-type: none"> <li>– Automatic selection of the yarn from the sample into the measuring zone</li> <li>– Setup of 24 samples, finishing of the incomplete test after end of the test</li> </ul>                                       |
|                  | <b>Computer software</b>          | <ul style="list-style-type: none"> <li>– Uster Tensojet 5 intuitive touch application software</li> <li>– Windows Embedded 8.1 operating system</li> <li>– System pre-configured and locked down</li> <li>– Simple full system update process</li> </ul> |
|                  | <b>Computer hardware</b>          | <ul style="list-style-type: none"> <li>– Industrial computer with Intel processor</li> <li>– 3 internal hard drives for data security and system redundancy</li> <li>– 1 TB test data storage</li> </ul>   |
|                  | <b>Computer accessories</b>       | <ul style="list-style-type: none"> <li>– Large easy to read touchscreen monitor</li> </ul>   |

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

### Application software

|                   |  |   |
|-------------------|--|---|
| Reports           | <b>Type of report</b>                      | <ul style="list-style-type: none"> <li>– Standard test report of the measurement series</li> <li>– Uster Quality Report (summary of the key data and the test results on one page; quality certificate)</li> <li>– Pre-defined table reports and graphical reports for different application</li> <li>– Long-term reports</li> </ul>  |
|                   | <b>Display and printout of the reports</b> | <ul style="list-style-type: none"> <li>– Live view report during the measurement</li> <li>– Analysis tool with all measured data and graphical output</li> <li>– Smart view report for exceptions and outliers</li> <li>– Automatic printout possibility after the measurement</li> </ul>   |
|                   | <b>Limit values</b>                        | <ul style="list-style-type: none"> <li>– Setting of customized limits according to the Uster Statistics, standard deviation, relative and absolute count</li> <li>– Automatic verification of the measured value</li> <li>– Measured values which exceed the limit will be marked with red or purple color in the report</li> </ul>   |
| Numerical results | <b>Breaking force</b>                      | Maximum force value measured during the tensile test  |
|                   | <b>Breaking elongation</b>                 | Elongation at maximum breaking force value  |
|                   | <b>Tenacity</b>                            | Breaking force in relation to the yarn count of the sample  |
|                   | <b>Breaking work</b>                       | Work done to break (enclosed area below the force/elongation characteristic curve up to the point of breaking force)  |
| Statistics        | <b>Statistical values</b>                  | <ul style="list-style-type: none"> <li>– Mean value</li> <li>– Standard deviation s</li> <li>– Coefficient of variation CV</li> <li>– Q95% confidence interval</li> <li>– Minimum value</li> <li>– Maximum value</li> <li>– Percentage values – 0.01 / 0.05 / 0.1 / 0.5 and 1% of the total breaks are smaller or equal to the indicated force, elongation and work</li> <li>– Number of isolated weak places</li> <li>– USP™ (Uster Statistics Percentile)</li> <li>– UTRexp (expected traditional tensile value Uster Tensorapid, testing speed: 5 m/min, test length: 500 mm)</li> </ul> |
|                   | <b>Uster Statistics</b>                    | <ul style="list-style-type: none"> <li>– Comparison of measured values with the Uster Statistics</li> <li>– Material-dependent Uster Statistics are stored in the data-base</li> <li>– Setting of limit values based on the Uster Statistics</li> </ul>   |

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

### Graphic output of results

#### Stroke diagram

Available for breaking force and elongation

#### Histogram

Available for force and elongation

#### Force/elongation scatter plot

- Show all single measurements as individual points in scatter plot
- Easier detection of the sample due to different colors

#### Spectrogram

- Available for force and elongation
- Pre-condition: needs 200 within tests per sample

### Data protection

#### Backup

Automatic backup to dedicated internal hard drive every 15 minutes

### Input of data, output of results, languages, units

#### Dialog and report languages

English, German, French, Italian, Spanish, Portuguese, Turkish, Russian, Chinese or Japanese can be selected (other languages on request)

#### Possible units

- Force values:  
DN, N, cN, kgf, gf, lbf, ozf
- Yarn count:  
ktex, tex, dtex, denier, Nm, Nec, Nel, New, grn/yd, Y.S.W.
- Tenacity:  
mN/tex, cN/tex, gf/denier, Rkm, CSP, MPA

### System security

#### Protection function

- System protected from viruses, network and other security threats
- Remote support capabilities built in
- Diagnostic tools with extensive event logging
- Automated system recovery

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

### General

|                            |  |   |
|----------------------------|--|---|
| General ambient conditions | <b>Room climate</b>                      | The ambient conditions must be maintained in order to avoid any influencing of the test material according to ISO 139 (2015)<br>– Humidity: $65 \pm 4\%$<br>– Temperature: $20 \pm 2^\circ$ |
|                            |  |   |
| Installation data          | <b>Electrical connection</b>             | Single-phase mains with protective conductor  |
|                            | <b>Mains voltage range</b>               | 100 – 240 VAC   |
|                            | <b>Mains frequency</b>                   | 50/60 Hz  |
|                            | <b>Power consumption</b>                 | Maximum 1,000 VA (all units and motors switched on)   |
|                            | <b>Compressed air consumption</b>        | 40 m <sup>3</sup> /h with normal pressure (atmospheric pressure)  |
|                            | <b>Compressed air connection</b>         | – Air quality: according to ISO 8573.1, class 3<br>– Min. pressure at inlet of air filter regulator: 6 bar<br>– Max. pressure at inlet of air filter regulator: 10 bar                      |
|                            | <b>Dew point</b>                         | 2 to 3 °C or lower at atmospheric pressure  |
|                            | <b>Oil content</b>                       | Oil-free, or residual oil content <1 mg/m <sup>3</sup>  |
|                            | <b>Solids content</b>                    | <5 mg/m <sup>3</sup> , particle size <5 mm  |
|                            | <b>Noise level of the suction nozzle</b> | Maximum 70 dB(A) at 1 m distance, depending on the yarn, count noise can be lower   |
| Weight of the installation | <b>Tester</b>                            | 153 kg  |
|                            | <b>Table with waste yarn container</b>   | 103 kg  |
|                            | <b>Complete system</b>                   | 290 kg  |

# USTER® TENSOJET 5

## The WEAVABILITY™ measurement system

### Uninterrupted power supply (UPS)

UPS must be provided by the customer

|                  |                                      |                                     |
|------------------|--------------------------------------|-------------------------------------|
| Electrical Input | <b>UPS Model</b>                     | Tower                               |
|                  | <b>UPS Bypass Type</b>               | ON-Line                             |
|                  | <b>Nominal Voltage</b>               | 120 VAC, 220 – 240 VAC              |
|                  | <b>Voltage range<br/>120 VAC</b>     | 90 – 138 VAC                        |
|                  | <b>Voltage range<br/>230 VAC</b>     | 160 – 276 VAC                       |
| Output           | <b>Frequency</b>                     | 50/60 Hz                            |
|                  | <b>Nominal Output<br/>Voltage</b>    | 120 VAC, 230 VAC                    |
|                  | <b>Power Capacity</b>                | 1,500 VA (1.5 kVA)/1,350 W          |
|                  | <b>Voltage regulation</b>            | +/-3%                               |
| Enviroment       | <b>Safety markings<br/>120/208 V</b> | UL, CUL, VCCI                       |
|                  | <b>Safety markings<br/>230 V</b>     | CE, GS                              |
|                  | <b>Ambient operating<br/>temp.</b>   | Laboratory condition are acceptable |
|                  | <b>Relative humidity</b>             | Laboratory condition are acceptable |


Note: It is not permitted to connect a Laser Printer.



# USTER® TENSOJET 5

The WEAVABILITY™ measurement system

Space required for  
the Uster Tensojet 5

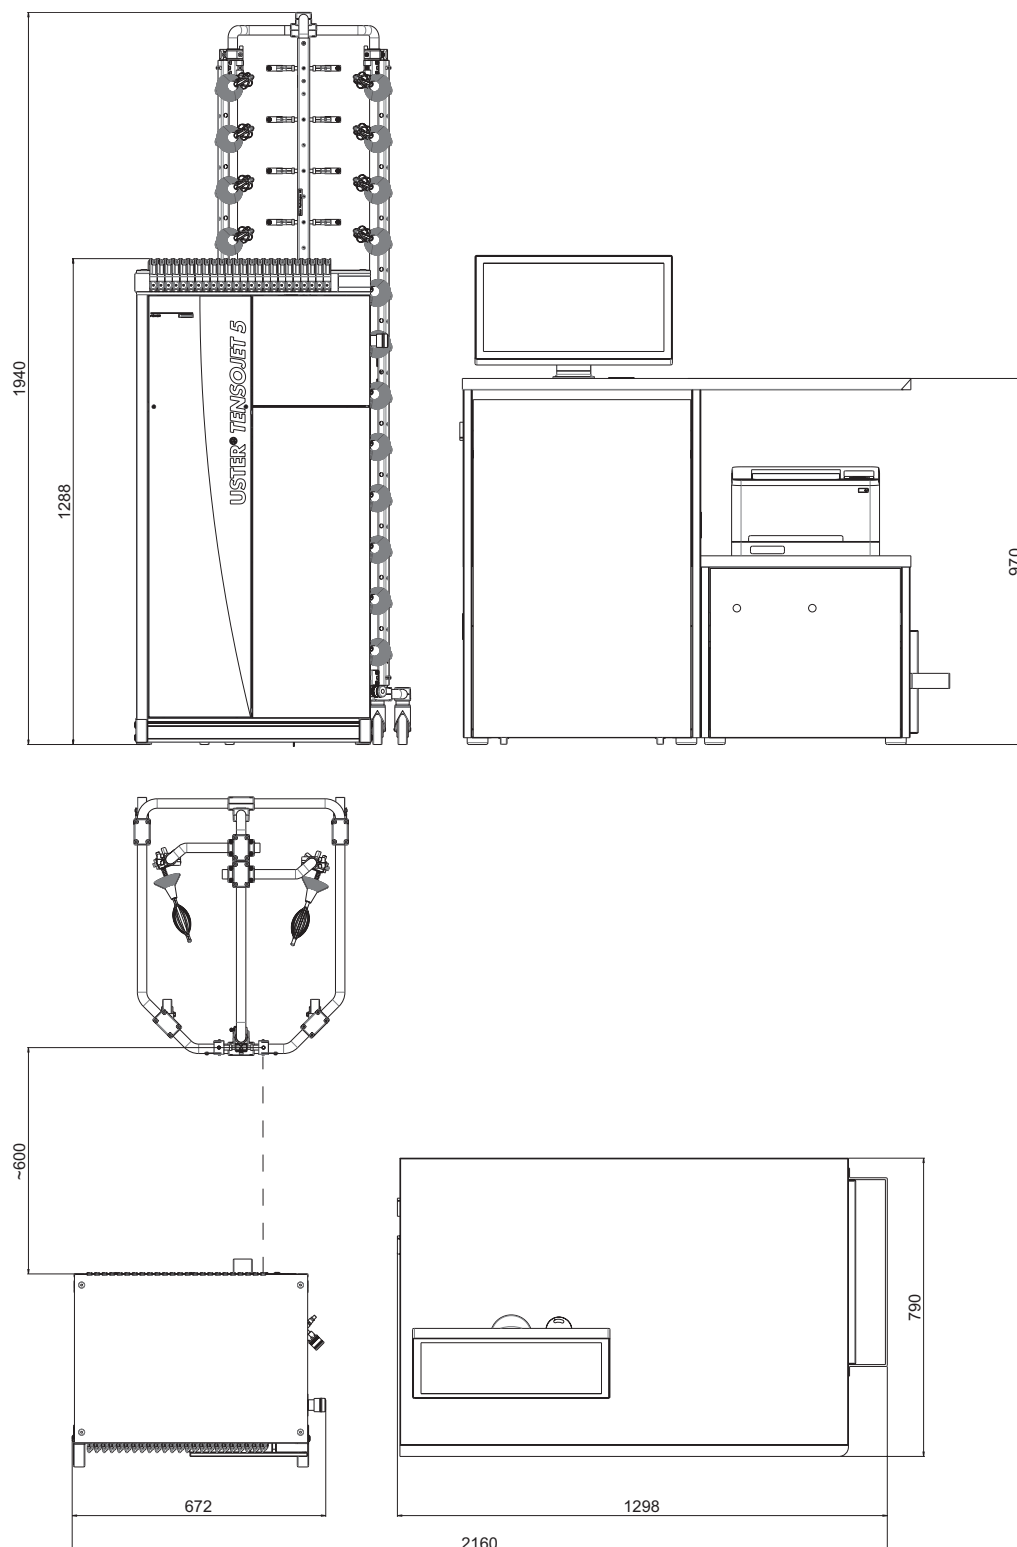

Uster Technologies has made all possible efforts to ensure that all information is accurate at the time of publication. Hereby it is declared that alterations to the product may be possible at any time. In these cases the information contained in this technical datasheet is subject to change without notice.

November 2021



## Uster Technologies AG

Sonnenbergstrasse 10

8610 Uster

Switzerland

T. +41 43 366 36 36

F. +41 43 366 36 37

[sales@uster.com](mailto:sales@uster.com)

[www.uster.com](http://www.uster.com)