



USTER® EVS FABRIQ VISION N

The fabric quality assurance system

Technical Data

May 2019


USTER® EVS FABRIQ VISION N

The fabric quality assurance system

USTER® EVS FABRIQ VISION N ensures this is achieved, by using automated control during intermediate and final inspection. The system's ability to capture any visible defects allows fabric yield to be optimized and prevents claims.

Elements

of the USTER® EVS FABRIQ VISION N installation

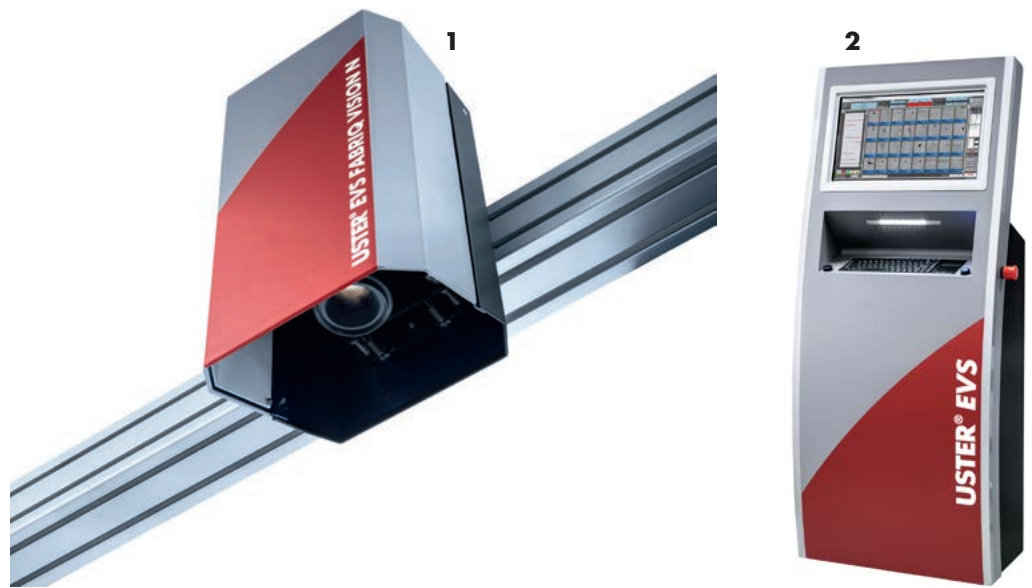

Basic installation

- 1 Spectrosopes
- 2 UEVS Control Unit including touchscreen monitor
- 3 Album (no illustration)

Options

- 4 All in one PC (no illustration)
- 5 Additional album computer (no illustration)
- 6 Optimized Cut Control with laser pointer (no illustration)
- 7 Infrared marker (no illustration)

USTER® EVS FABRIQ VISION N

The fabric quality assurance system

Basic installation

Overall installation	Functions	<ul style="list-style-type: none"> - USTER® EVS FABRIQ VISION N visualizes defects onscreen in the user interface - Integrated image acquisition and processing - Real-time integrated image acquisition processing - All defects are detected, categorized, saved and displayed on the operator interface - High-speed detection capabilities - Color (RGB) or black and white (monochrome) image processing - Full color defect image display - Album review cleans and optimizes for final cutting
	Included in the delivery	<ul style="list-style-type: none"> - Spectroscopes - UEVS Control Unit including touch screen monitor - Illumination unit - Encoder (length meter) - Application software

Subsystem of the USTER® EVS FABRIQ VISION N:

Test unit (1)	Application range	<ul style="list-style-type: none"> - Recommended for in-line inspection of woven, knitted, warp knitted and nonwoven fabrics - Special patterns and designs on request - Automotive, technical textiles, nonwovens and medical, home textiles, apparel and composites
Installation options	In-line	<ul style="list-style-type: none"> - After the coating-line, dyeing-line or at the exit of a finished range as stand-alone or together with USTER® EVS FABRIQ SHADE
	Illumination	<ul style="list-style-type: none"> - Depending on the characteristics of the defects the system can use either a transmitted or reflective light source, which can differ between the inspection lines
UEVS Control Unit (2)	Computer software	<ul style="list-style-type: none"> - USTER® EVS FABRIQ VISION N intuitive touch application software - Windows operating system - System pre-configured and locked down - Simple full system update process
	Computer hardware	<ul style="list-style-type: none"> - Computer with Intel® processor - 1 internal 500 GB hard drive

USTER® EVS FABRIQ VISION N

The fabric quality assurance system

Options

All in one PC (4)	Application	Instead of USTER® EVS Control Unit
Additional Album PC (5)	Application range	Additional Album PC for the application of the album review only
Optimized Cut Control (OCC) with laser pointer (6)	Application range	<ul style="list-style-type: none">– After the album review, the defect map is synchronized at the OCC, which stops the cutting table automatically at the precise point of the planned cut of defective fabric– The laser pointer indicates the exact position of defects during the cutting table process
Infrared marker (7)	Application range	<ul style="list-style-type: none">– To locate the exact position of defects and cutting points with high accuracy, USTER uses an infrared marker to put invisible marks on the fabric selvage– This is used later in the sync process at the OCC, when the infrared sensor detects the invisible marks

USTER® EVS FABRIQ VISION N

The fabric quality assurance system

Application Software for USTER® EVS FABRIQ VISION N

Reports	Type of report	<ul style="list-style-type: none"> – Defect map – Defect images – Defect lists – Defects distribution – Statistical graph – Statistics per section – Defects grading
	Album mode	<ul style="list-style-type: none"> – The album contains the history of past roll inspections – Specific roll inspections can be recalled, which allows the user to perform the complete set of actions in offline mode
	Roll list	<ul style="list-style-type: none"> – The roll selection window allows to select a roll to work on, export and delete rolls
Coding and Classification	List of codes	<ul style="list-style-type: none"> – Alphanumeric codes can be attributed to the defects that are of importance
	Classification	<ul style="list-style-type: none"> – The classification module enables the user to define several classes to get automatic classification based on the classes defined – The classification module is used to attain quickly most of the cases of a given defect type or to get an initial base classification
Optimized Cut Control (OCC)	Display and printout of the reports	<ul style="list-style-type: none"> – The Cut Optimization module allows optimizing for the best quality, ensuring the best yield – It permits to cut out portions of bad quality fabric, defining the best length for each roll – The Cut Optimization is a combination of various permutations and combinations based on the selection of options
Input data, output of results, languages, units system security	Dialog and report languages	English, German, French, Italian, Spanish, Portuguese, Turkish, Hebrew, Polish, Dutch, Czech, Chinese or Japanese can be selected (other languages on request)
	Possible units	<ul style="list-style-type: none"> – Length: foot, yard or meter – Width: inch or millimeter – Points per 100: foot, yard or meter – Majors per 100: foot, yard or meter – Speed: ft/min, yd/min or m/min
Selftest	Function check	<ul style="list-style-type: none"> – Remote support capabilities built-in – Diagnostic tools with extensive event logging

USTER® EVS FABRIQ VISION N


The fabric quality assurance system

Installation conditions

General ambient conditions	Mill climate	<ul style="list-style-type: none">- The temperature should be maintained below 45° C and humidity should be kept below 80 % without condensation- The general electronic devices of the system may behave abnormally and usually have higher failure rates above the specified limits
Installation	Electrical connection	Single phase with protective conductor
	Mains voltage range	100 – 240 VAC
	Mains frequency	50/60 Hz
	Power consumption	Maximum 1 000 VA
	Compressed air connection	Not required
Gross weight of the basic function	FABRIQ VISION N	<ul style="list-style-type: none">- Spectroscope: 2.5 kg/piece- Control unit: 135 kg

USTER® EVS FABRIQ VISION N
 The fabric quality assurance system

UEVS Control Unit

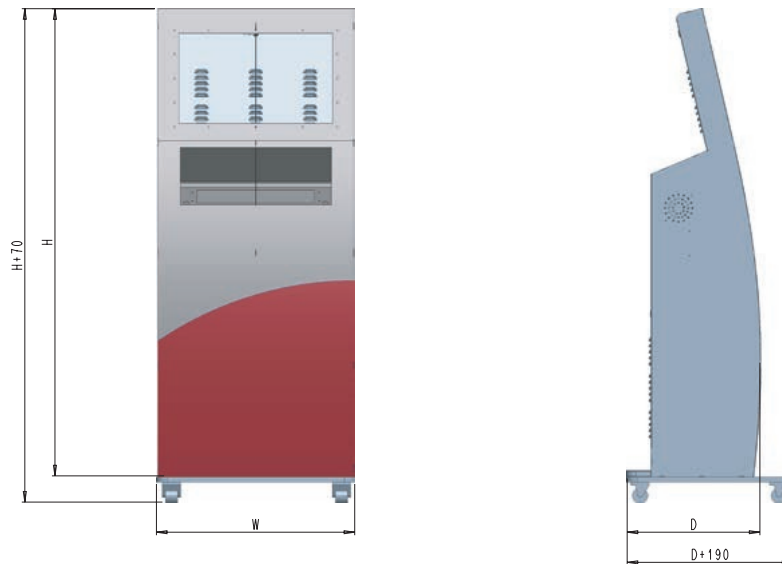

UEVS Control Unit Dimensions in mm (referring to drawing above)	W=width mm	H=height mm	D=depth mm
	190	171	399

UEVS Control Unit Dimensions in yards (referring to drawing above)	W=width yds	H=height yds	D=depth yds
	0.21	0.19	0.44

Uster Technologies has made all possible efforts to ensure that all information is accurate at the time of publication. Hereby it is declared that alterations to the product may be possible at any time. In these cases the information contained in this technical datasheet is subject to change without notice.

May 2019



Uster Technologies AG

Sonnenbergstrasse 10

8610 Uster

Switzerland

T. +41 43 366 36 36

F. +41 43 366 36 37

sales@uster.com

www.uster.com