



USTER[®] SENTINEL

The ring spinning optimization system


Technical Data

May 2019

USTER® SENTINEL

The ring spinning optimization system

USTER® SENTINEL monitors the productivity of all spindles and provides all the links and information that help yarn producers to make optimization decisions at ring spinning based on reliable facts.

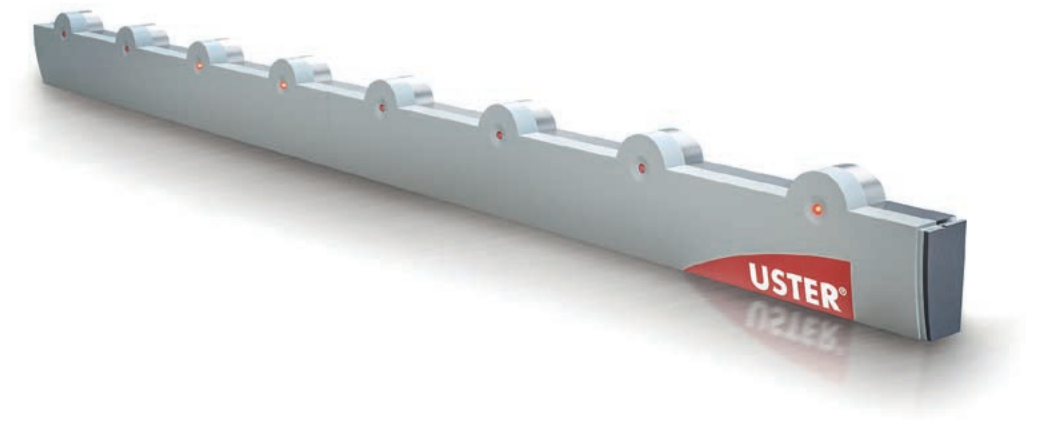

Basic installation

Overall installation

Functions

- Real-time diagrams for end-breaks, speed, power consumption, temperature and humidity, for every machine
- Bobbin build-up report includes information on end-breaks, ambient conditions, wear of mechanical parts, machine speed, personnel and energy
- Energy monitoring provides detailed information on the power consumption
- Integrated personnel management
- Off-Standard feature detects hidden quality risks and stop the production
- Reports can switch from mill overview down to sections or even a single spindle
- Detailed production and quality data for every ring spinning machine
- Run/stop diagram with stop reasons, chain break and extensive break alarm indications
- Machine Display device uses the double-sided LED display to show the real-time production information, such as end break, slip, idle, rogue, end-break modification average time, and efficiency

Included in the delivery

- Single spindle monitoring sensor
- 1 main shaft sensor for each ring spinning machine
- 1 front roller sensor for each ring spinning machine
- 1 doff sensor for each ring spinning machine
- 1 energy sensor for each ring spinning machine
- Application software USTER® SENTINEL

USTER® SENTINEL

The ring spinning optimization system

Subsystem of the USTER® SENTINEL:

Standard
equipment

USTER® SENTINEL server

- Industrial computer with Intel i7 processor
- 3 internal 500 GB hard drives for data security and system redundancy
- 8 GB memory
- Microsoft® Windows Embedded 8.1 Industry Pro 64-bit
- Microsoft® SQL server 2014 Express
- Sentinel server software pre-installed
- Sentinel client software pre-installed
- TeamViewer 10 pre-installed
- 1 dongle key for the Sentinel server
- Supports up to 150 machine stations and 100 000 spindles
- 1 Sentinel server for a ring spinning mill

Machine stations

Supports up to 2048 spindles for each ring spinning machine
1 machine station for each ring spinning machine

Alarm lamps

2 front alarm lamps and 2 rear alarm lamps
for each ring spinning machine

Options

Optional
equipment

Temperature and humidity sensor

1 temperature and humidity sensor
for each ring spinning machine

Machine Display

1 Machine Display for each ring frame

Mill Dash board

1 Smart box per TV Monitor

Roving Stop

Supports 6 or 8 spindles for each bar of Roving Stop Device

USTER® SENTINEL

The ring spinning optimization system

Additional equipment

The USTER® SENTINEL can be expanded by adding additional equipment. Uster Technologies AG does not supply the additional equipment.

Client PC for USTER® SENTINEL	<ul style="list-style-type: none">– Minimum Microsoft® Windows 7– Microsoft® .NET Framework 4.5
Client Tablet	<ul style="list-style-type: none">– Web application– Browser: Safari or Chrome Version 70.XXX and higher
Printer	<ul style="list-style-type: none">– No specific requirement– Note that the colors in reports may not be distinguished in the black and white print

Scope of application

Application range	Yarn type	For spun yarns consisting of natural fibers, blended fibers, synthetic fibers, twin spun yarns and slub yarns
	Count range	Tested application range from 3.94 tex to 98.4 tex, Ne 6 to Ne 150, Nm 10.2 to Nm 254
	Yarn color	For all yarn colors
	Ring types	For all flange rings
	Traveler types and color	For all traveler types & colors
	Machine speed	Successfully operating up to 25 000 Min ⁻¹
	Machine gauge	70 mm and 75 mm supported

USTER® SENTINEL

The ring spinning optimization system

Ring spinning machine supported types

Uster Technologies provides machine-specific variants of USTER® SENTINEL installation. A ring-spinning machine from a particular manufacturer can therefore only be equipped and operated with an USTER® SENTINEL variant that has been developed and adapted specifically for that machine type. USTER® SENTINEL is available for the following ring spinning machine:

Available types	Toyota	RX300, RX240 and similar
	Jingwei	JWF1526, JWF1562, JWF1566 and similar
	Marzoli	NSF-3, MDS and similar
	Lakshmi	LR-6, LR 9 and similar
	Rieter	G32, G33, K44, K45 and similar
	Tonghei	TH 578J, TH 598J
	Zinser	RM350, RM351, Z71, Z72 and similar

Additional ring frame models can be retrofitted upon request. A separate questionnaire is provided for new retrofit options.

USTER® SENTINEL

The ring spinning optimization system

Application Software for USTER® SENTINEL

Feature overview	Real time communication and control	Live view of the ring spinning machine state
	Setting management	<ul style="list-style-type: none">– Central article management– Modify, store and download articles setting
	Advanced analysis	<ul style="list-style-type: none">– Run7stop diagram for ring spinning machines– Bobbin build-up report
	Intuitive reporting	<ul style="list-style-type: none">– Exceptions handling and reporting– Set of predefined role oriented reports– Production, personnel performance– End breaks, slip spindles, off-quality spindles, stops, maintenance– Alarms for chain breaks and high end breaks– Report editor– Machines monitoring– Team and personnel performance
Monitoring	Automated data management	<ul style="list-style-type: none">– Automatic export of data– Shift calendar– Uploading articles data– Data storage in a database– User management – authorization
	Dashboard	<ul style="list-style-type: none">– Shows an overview about following major production data of all areas:<ul style="list-style-type: none">– efficiency– end breaks– total production– alarms– temperature / humidity– operators– articles– energy consumption– machines in maintenance
	Area view	<ul style="list-style-type: none">– Shows an overview of all ring spinning machines in the selected area– Predefined graphical shift reports for<ul style="list-style-type: none">– end breaks– ambient conditions– energy– Drill down function for the single machine information– Assign operator information to ring frames

USTER® SENTINEL

The ring spinning optimization system

Monitoring	Managers day reports	<ul style="list-style-type: none">– Customized report– Up to four report templates combined in one provide the mill performance per day or week
	Actual exception report	<ul style="list-style-type: none">– Shows the status of the spindle state of the shift
Reports	Machine state	<ul style="list-style-type: none">– Run-Stop-Diagram
	Tables	<ul style="list-style-type: none">– Breaks– Highest end break machine– Highest productivity per spindle machine– Highest startup breaks machines– Lowest AEF machines– Production– Alarm analysis trend– Article production– Efficiency trend
	Charts	<ul style="list-style-type: none">– Alarm analysis trend– Article production– Efficiency trend– Machine efficiency– Machine yarn breaks– Production share per article– Production trends– Stop trends– Yarn break trend
	Exceptions	<ul style="list-style-type: none">– Machine exceptions– Chain break spindles– End break spindles– Idle spindles– Lowest AEF spindles– Rogue spindles– Slip spindles– Startup break spindles
	Special	<ul style="list-style-type: none">– Bobbin build-up– Doff reports
	Export	<ul style="list-style-type: none">– Export reports are automatically stored as CSV files at the end of the day or the shift– Quality Expert Export (Shift)– Production Export (Day)– Machine Exceptions Export(Shift)– Production Export (Shift)

USTER® SENTINEL

The ring spinning optimization system

Configuration	General settings	<ul style="list-style-type: none"> - Setting of mill information, mill plan, areas and machines - Setting of units - Setting of export function
	Users	<ul style="list-style-type: none"> - Definition of user roles and password definition
	Shift	<ul style="list-style-type: none"> - Default plan and current plan - Definition shifts and start time - Shift plan in calendar format
	Personal management	<ul style="list-style-type: none"> - Configuration of personnel and team - Assignment to the shift plan
Reports	Type of report	<ul style="list-style-type: none"> - Predefined table reports and graphical reports for different application - Customized reports
	Display and printout of results	Monitoring and Reports with real time data
	Limit values	<ul style="list-style-type: none"> - Setting of customized limits according to absolute, relative, kg and 1 000 /spdh - Automatic verification of the measured values - Measured values which exceed the limit will marked with red color in the reports
Statistics	Statistical values	<p>Overall result protocol with statistical data of the results</p> <ul style="list-style-type: none"> - SUM - Mean value
System security	Protection function	<ul style="list-style-type: none"> - Remote support capabilities build-in - Diagnostic tools with extensive event logging
Data protection	Backup	<ul style="list-style-type: none"> - Automated data maintenance - Automated backup every 24 hours - Automated and configurable data export
Input data, output of results, languages, units	Possible units	<ul style="list-style-type: none"> - Productivity: m/min, yd/min - Yarn count: Ne, Nm, tex - End breaks counter: EB/1 000sh, EB/absolute - Length: m, km, yd, ky - Weight: g, kg, lbs - Time: minutes, hours, shift, week, month and year - Power/Energy: kWh, kWh/kg - Temperature: Celsius, Fahrenheit

USTER® SENTINEL

The ring spinning optimization system

USTER® SENTINEL with connections to other systems

The following Value Modules are available if the required sensor/instrument combinations exist:

Ring Spinning
Optimization
(RSO)

**Based on the
combination of**

- USTER® SENTINEL
- USTER® QUANTUM 3
- USTER® QUANTUM EXPERT 3
- USTER® TESTER 6

Ring Spinning
Optimization 3D
(RSO 3D)

**Based on the
combination of**

- USTER® SENTINEL
- USTER® QUANTUM 3
- USTER® QUANTUM EXPERT 3
- Muratex QPRO EX/FPRO EX

RSO and RSO 3D available for link winders only.

Installation conditions

General ambient
conditions

**Operating
climate**

- Temperature: 0 – 50° C
- Relative humidity: 35 – 95 %

**Water and
dust resistance**

IP class 60

Installation

**Mains voltage
range**

100 – 240 VAC

Mains frequency

50/60 Hz

**Power
consumption**

- USTER® SENTINEL workstation 240 W
- Machine station 600 W

**Connection
type**

By Ethernet Port via LAN cable. The installation and maintenance of the LAN is entirely in the responsibility of the customer. The network is an important prerequisite for correct and continuous operation of the USTER® SENTINEL system.

Gross weights

**USTER® SENTINEL
workstation**

16 kg

Machine station

9 kg

Uster Technologies has made all possible efforts to ensure that all information is accurate at the time of publication. Hereby it is declared that alterations to the product may be possible at any time. In these cases the information contained in this technical datasheet is subject to change without notice.

May 2019



Uster Technologies AG

Sonnenbergstrasse 10

8610 Uster

Switzerland

T. +41 43 366 36 36

F. +41 43 366 36 37

sales@uster.com

www.uster.com